


P1: M-060A

P2: M-059A


Customer No.: NO.1

P1

P2

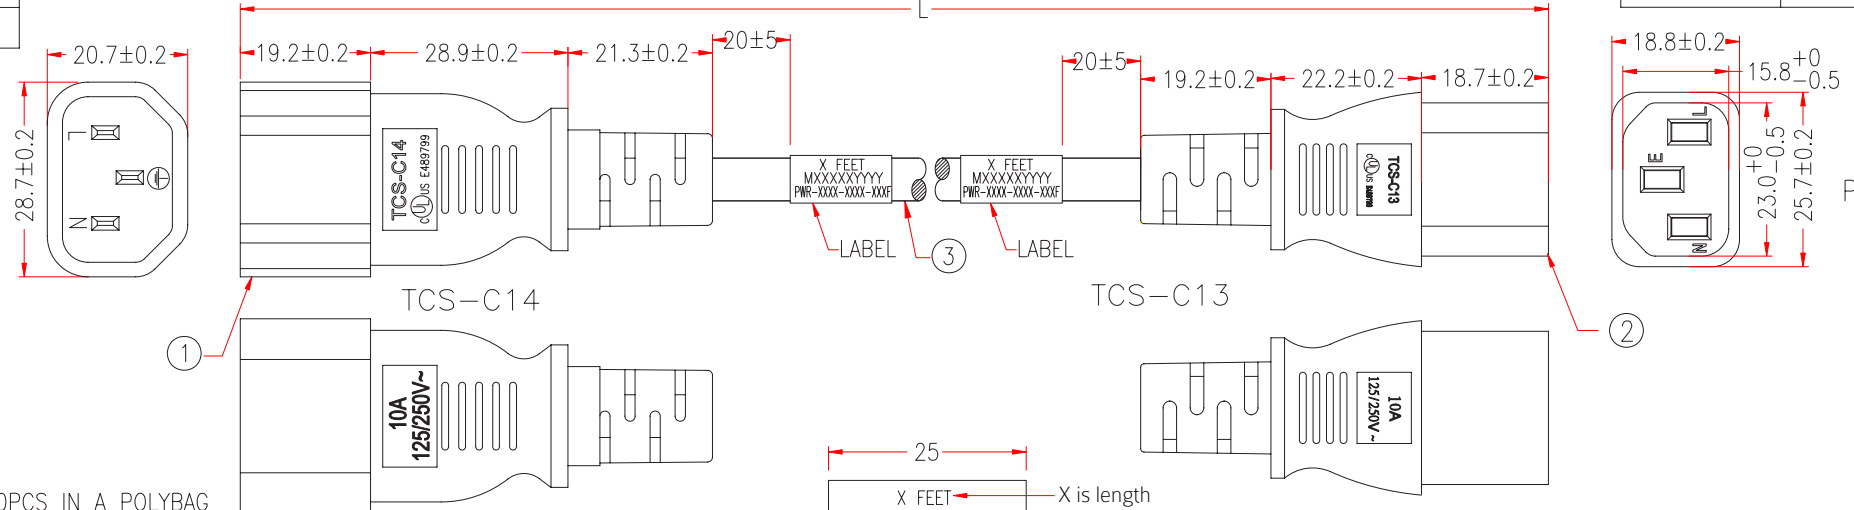

PACKING: 10PCS IN A POLYBAG
 PACKING A: <3FT PACKING B: >=3FT

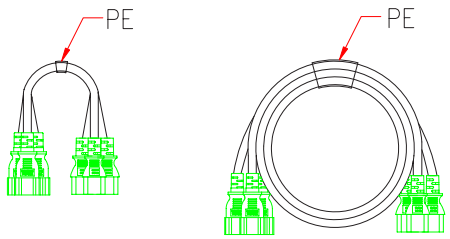

P/N	JACKET & MOLDED & BRACKET COLOR
PWR-34VL-12BK	BLACK
PWR-34VL-12BL	BLUE(PT286C)
PWR-34VL-12RD	RED(PT201C)
PWR-34VL-12GN	GREEN(PT376C)
PWR-34VL-12GR	GRAY(PANTONE421C)
PWR-34VL-12OR	ORANGE(PANTONE1565C)
PWR-34VL-12YE	YELLOW(PANTONE123C)

CABLE MARKING:

(UL) SVT 3/C 18AWG(0.824MM²) VW-1 105°C 300V E495164
 C (UL) SVT 3/C 0.824MM²(18AWG) FT2 105°C 300V E495164 TCS

	P1	P2
BLACK	L	L
WHITE	N	N
GREEN	E	E

P1: TCS-C14 cULus E489799

P2: TCS-C13 cULus name

*NOTE: All relevant materials are complied with RoHS directive .
 THE MARKING IS CONCAVE LETTERING MOULD
 The label is waterproof

No.	DESCRIPTION	Q'TY	Supplier
3	UL SVT 18AWG x 3C, OD 6.3mm, SVT Jacket		M304
2	MOLDED PVC 35P, COLOR SEE LIST		M304
	BRACKET: CP-R445A-BS	1	M767
1	TERMINAL: 2*4mm 98744BS-0/A	3	M257
	MOLDED PVC 35P, COLOR SEE LIST		M304
	BRACKET: YS-014, COLOR SEE LIST	1	M767
	TERMINAL: 2x4mm 98672BS-1	3	M257

APPROVED	CHECKED	DRAWING	DESCRIPTION	UNIT: mm
	HU	ZHU	POWER SUPPLY CORDS & CORDS SETS	
	25/SEP/17	25/SEP/17	PRODUCT NO. PWR-34VL-12xx-xxxF	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm



Cable Length Unless Other Spec.
 Tolerances:
 0 ~200mm ±10mm
 201~1000mm ±20mm
 1001~1500mm ±25mm
 1501~2100mm ±30mm
 2100mm± ±40mm