


P1: M-060A


P2: M-061A

Customer No.: NO.1

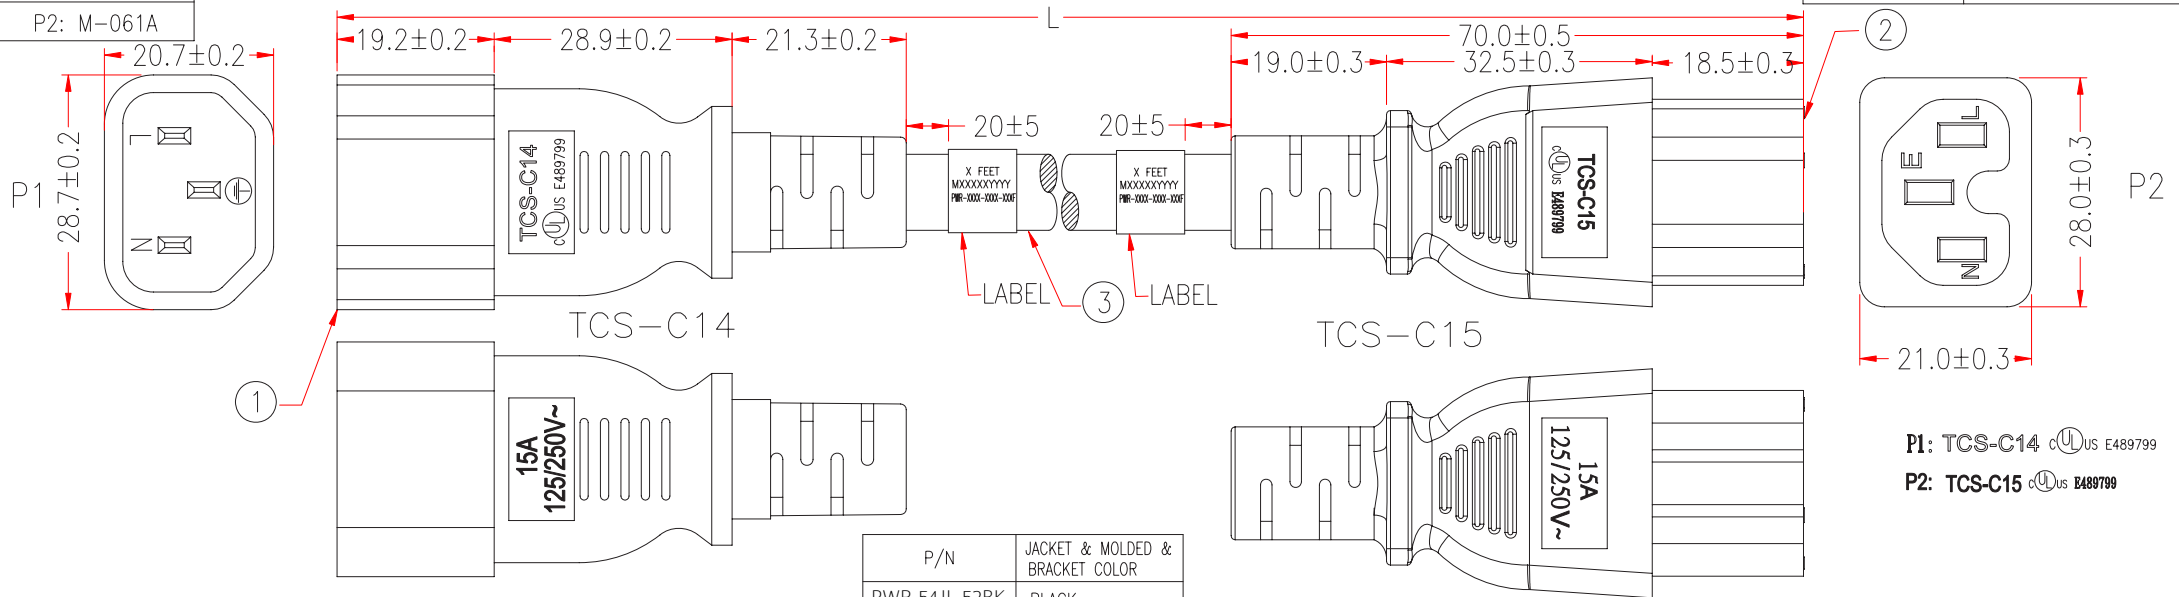


P1: TCS-C14 cULus E489799
 P2: TCS-C15 cULus E489799

| P/N | JACKET & MOLDED & BRACKET COLOR |
|---------------|---------------------------------|
| PWR-54JL-52BK | BLACK |
| PWR-54JL-52RD | RED(PT201C) |
| PWR-54JL-52GN | GREEN(PT376C) |
| PWR-54JL-52BL | BLUE(PT286C) |
| PWR-54JL-52GR | GRAY(PANTONE421C) |
| PWR-54JL-52OR | ORANGE(PANTONE1565C) |
| PWR-54JL-52YW | YELLOW(PANTONE123C) |

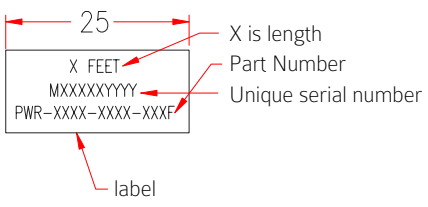

PACKING: 10PCS IN A POLYBAG

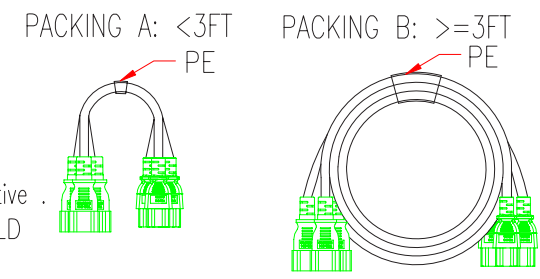

*NOTE: All relevant materials are complied with RoHS directive .
 THE MARKING IS CONCAVE LETTERING MOULD
 The label is waterproof

MARKING:

(UL) SJT 3/C 14AWG(2.08MM²) VW-1 105°C 300V E495164
 C (UL) SJT 3/C 2.08MM²(14AWG) FT2 105°C 300V E495164 TCS

| P1 | P2 |
|---------|---------|
| L _____ | L BLACK |
| N _____ | N WHITE |
| E _____ | E GREEN |

| | | | | |
|-----|---|-------------|--------|----------|
| 3 | UL SJT 14AWG x 3C, OD 9.3mm, SJT Jacket | H5TC47-0304 | L-40mm | M304 |
| 2 | MOLDED PVC 35P, (COLOR SEE LIST) | H1BC02-0304 | | M304 |
| | BRACKET: 9745C (COLOR SEE LIST) | A1QC42-0767 | 1 | M767 |
| | TERMINAL: 98745L | A1QB43-0257 | 3 | M257 |
| 1 | MOLDED PVC 35P,(COLOR SEE LIST) | H1BC02-0304 | | M304 |
| | BRACKET: YS-014 (COLOR SEE LIST) | A1QC10-0767 | 1 | M767 |
| | TERMINAL: 2x4mm 98672BS-1 | A1QB07-0257 | 3 | M257 |
| No. | DESCRIPTION | | Q'TY | Supplier |

| | | | | | | | |
|----------|-----|-----------|--|--|---|-------------|---------------------------------|
| APPROVED | | | | | Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm | | |
| CHECKED | HU | 25/SEP/17 | | | | DRAWN NAME | POWER SUPPLY CORDS & CORDS SETS |
| DRAWING | ZHU | 25/SEP/17 | | | | PRODUCT NO. | PWR-54JL-52xx-xxxF |

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

